



RoHS

- HM9E load cells are available in the capacities 50Klb~250Klb, 20t~100t.
- Alloy steel construction, hermetically welded, oil proof, waterproof, anti-corrosive gas and medium making it suitable for all kinds of environments.
- Dual shear beam, suitable for electronic truck scales, automobile testing facilities, track scales and other electronic weighing devices.


Features

- Capacity 5Klb~250Klb; 20t~100t
- High accuracy
- Alloy steel construction
- Easy installation and reliable performance

Specifications

Capacity	Klb	50/60/65/75/100/125/150/200/250			
	t	20/30/40/45/50/60/100			
Accuracy		C2	C3	A5S	A5M
Maximum number of verification intervals	nmax	2000	3000	5000	5000
Minimum load cell verification interval	vmin	Emax/5000	Emax/10000	Emax/15000	Emax/15000
Combined error	(%FS)	$\leq \pm 0.030$	$\leq \pm 0.020$	$\leq \pm 0.018$	$\leq \pm 0.026$
Creep	(%FS/30min)	$\leq \pm 0.024$	$\leq \pm 0.016$	$\leq \pm 0.012$	$\leq \pm 0.017$
Temperature effect on sensitivity	(%FS/10°C)	$\leq \pm 0.017$	$\leq \pm 0.011$	$\leq \pm 0.009$	$\leq \pm 0.013$
Temperature effect on zero	(%FS/10°C)	$\leq \pm 0.023$	$\leq \pm 0.015$	$\leq \pm 0.010$	$\leq \pm 0.014$
Output sensitivity	(mv/v)	3.0 ± 0.003			
Input resistance	(Ω)	700 ± 7			
Output resistance	(Ω)	703 ± 4			
Insulation resistance	(MΩ)	$\geq 5000(50VDC)$			
Zero balance	(%FS)	1.0			
Temperature, compensated	(°C)	$-10 \sim +40$			
Temperature, operating	(°C)	$-35 \sim +65$			
Excitation, recommended	(V)	5~12(DC)			
Excitation, max	(V)	18(DC)			
Safe overload	(%FS)	150			
Ultimate overload	(%FS)	300			

Outline Dimension mm(inch)

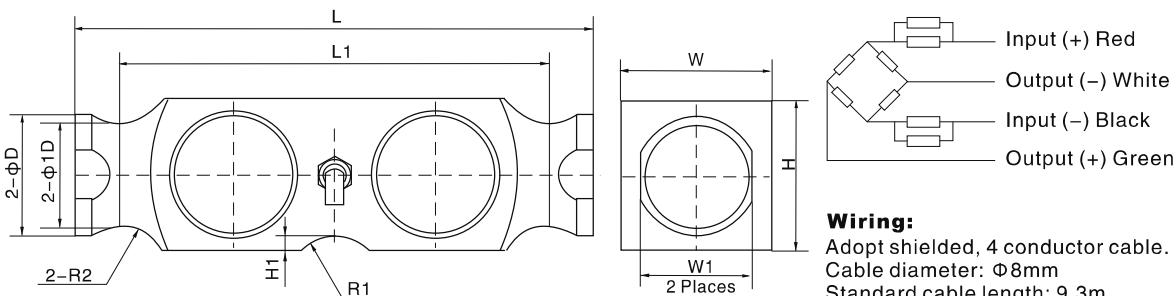

Wiring:

Adopt shielded, 4 conductor cable.
Cable diameter: Φ8mm
Standard cable length: 9.3m

Capacity	Dimension	L	L1	H	H1	W	W1	ΦD	ΦD1	R1	R2
20t~60t, 50Klb~125Klb		260 (10.24)	215.9 (8.5)	76.2 (3.0)	7 (0.28)	76 (2.99)	55.9 (2.2)	Φ61 (2.4)	Φ52.3 (2.06)	25.4 (1.0)	25.4 (1.0)
100t, 150Klb~250Klb		304 (11.97)	254 (10.0)	86.36 (3.4)	10 (0.39)	86.1 (3.39)	63.5 (2.5)	Φ70 (2.76)	Φ59.7 (2.35)	38.1 (1.5)	38.1 (1.5)