


Q84X5X12-05



RoHS

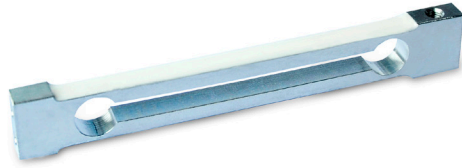

Specifications

| | |
|------------------------|------------------------|
| CAPACITY | 20g/30g/50g/100g |
| COMPREHENSIVE ERROR | 0.05 |
| OUTPUT SENSITIVITY | 0.5 ± 0.15 mV/V |
| NONLINEARITY | ± 0.05 % F.S. |
| REPEATABILITY | ± 0.05 % F.S. |
| HYSTERESIS | ± 0.05 % F.S. |
| CREEP | ± 0.05 % F.S. 3min |
| TEMP. EFFECT ON ZERO | ± 2.0 % F.S./10°C |
| TEMP. EFFECT ON OUTPUT | ± 0.05 % F.S./10°C |
| ZERO OUTPUT | ± 0.5 mV/V |
| INPUT RESISTANCE | 1055 ± 10 Ω |
| OUTPUT RESISTANCE | 1000 ± 10 Ω |
| INSULATION RESISTANCE | ≥ 2000 MΩ (50V) |
| EXCITATION VOLTAGE | ≤ 6 V |
| OPERATION TEMP. RANGE | -10 ~ +40°C |
| OVERLOAD CAPACITY | 150 % F.S. |
| RECOMMENDED USE | HANDABLE SCALES |

Dimensions mm(inch)

