


H2B

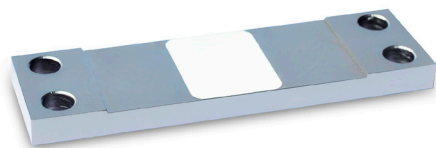

Specifications

| | |
|------------------------|------------------------------------|
| CAPACITY | 3110N |
| COMPREHENSIVE ERROR | 0.5 |
| OUTPUT SENSITIVITY | $1.5 \pm 0.2\text{mV/V}$ |
| NONLINEARITY | $\pm 0.3\%$ F.S. |
| REPEATABILITY | $\pm 0.3\%$ F.S. |
| HYSTERESIS | $\pm 0.5\%$ F.S. |
| CREEP | $\pm 0.05\%$ F.S.5min |
| TEMP. EFFECT ON ZERO | $\pm 0.2\%$ F.S./10°C |
| TEMP. EFFECT ON OUTPUT | $\pm 0.05\%$ F.S./10°C |
| ZERO OUTPUT | $\pm 0.06\text{mV/V}$ |
| INPUT RESISTANCE | $375 \pm 5\Omega$ |
| OUTPUT RESISTANCE | $350 \pm 3\Omega$ |
| INSULATION RESISTANCE | $\geq 2000\text{ M}\Omega$ (50V) |
| EXCITATION VOLTAGE | $\leq 10\text{V}$ |
| OPERATION TEMP. RANGE | $-10\sim+40^\circ\text{C}$ |
| OVERLOAD CAPACITY | 150% F.S. |
| RECOMMENDED USE | Suitable for measuring hook load |

Dimensions mm(inch)

