


# 1A

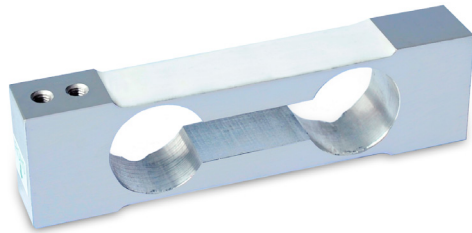

### Specifications

CAPACITY	0.5 kg、1kg、 2kg、 3kg
COMPREHENSIVE ERROR	0.02
OUTPUT SENSITIVITY	1.2 ± 0.1mV/V
NONLINEARITY	± 0.02% F.S.
REPEATABILITY	± 0.02% F.S.
HYSTERESIS	± 0.02% F.S.
CREEP	± 0.02% F.S.5min
TEMP. EFFECT ON ZERO	± 0.2% F.S./10°C
TEMP. EFFECT ON OUTPUT	± 0.02% F.S./10°C
ZERO OUTPUT	± 0.05mV/V
INPUT RESISTANCE	395 ± 10 Ω
OUTPUT RESISTANCE	350 ± 5 Ω
INSULATION RESISTANCE	≥ 2000 MΩ ( 50V )
EXCITATION VOLTAGE	≤ 10 V
OPERATION TEMP. RANGE	-10~+40°C
OVERLOAD CAPACITY	150% F.S.
RECOMMENDED USE	ELECTRONIC BALANCES

### Dimensions mm ( inch)

