


## 1HM



RoHS

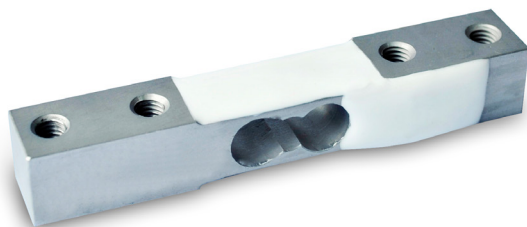

## Specifications

CAPACITY	0.5kg、1 kg	5kg、8kg、20kg
COMPREHENSIVE ERROR	0.02	
OUTPUT SENSITIVITY	1.0±0.15 mV/V	1.5±0.1 mV/V
NONLINEARITY	±0.02% F.S.	
REPEATABILITY	±0.02% F.S.	
HYSTERESIS	±0.02% F.S.	
CREEP	±0.02% F.S.5min	
TEMP. EFFECT ON ZERO	±0.2% F.S./10°C	
TEMP. EFFECT ON OUTPUT	±0.03% F.S./10°C	
ZERO OUTPUT	±0.1mV/V	
INPUT RESISTANCE	1055±10 Ω	
OUTPUT RESISTANCE	1000±10 Ω	
INSULATION RESISTANCE	≥2000MΩ (50V)	
EXCITATION VOLTAGE	≤10 V	
OPERATION TEMP. RANGE	-10~+40°C	
OVERLOAD CAPACITY	150% F.S.	
RECOMMENDED USE	KITCHEN SCALES、POSTAGE SCALES	

## Dimensions mm (inch)

