


## 1V3-350



RoHS

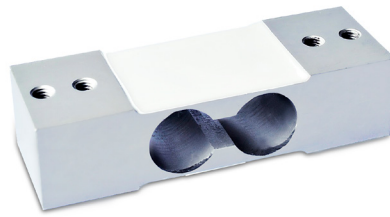

## Specifications

CAPACITY	5kg	10kg、25kg
COMPREHENSIVE ERROR	0.03	
OUTPUT SENSITIVITY	1.6±0.1 mV/V	2.0±0.2 mV/V
NONLINEARITY	±0.03% F.S.	
REPEATABILITY	±0.03% F.S.	
HYSTERESIS	±0.03% F.S.	
CREEP	±0.03% F.S.5min	
TEMP. EFFECT ON ZERO	±0.5% F.S./10°C	
TEMP. EFFECT ON OUTPUT	±0.03% F.S./10°C	
ZERO OUTPUT	±0.03 mV/V	
INPUT RESISTANCE	370±20Ω	
OUTPUT RESISTANCE	350±5Ω	
INSULATION RESISTANCE	≥2000 MΩ (50V)	
EXCITATION VOLTAGE	≤10V	
OPERATION TEMP. RANGE	-10~+40°C	
OVERLOAD CAPACITY	150% F.S.	
RECOMMENDED USE	PLATFORM SCALES	

## Dimensions mm (inch)

