


2A



RoHS

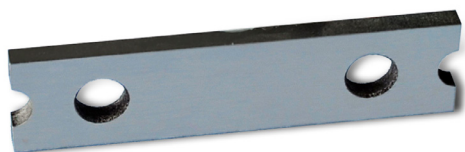

Specifications

MODEL	2A	2A-K
CAPACITY	15 Lb 、 50Lb	
COMPREHENSIVE ERROR	0.1	
OUTPUT SENSITIVITY	1.5±0.15 mV/V	
NONLINEARITY	±0.1%F.S.	
REPEATABILITY	±0.1 %F.S.	
HYSTERESIS	±0.1 %F.S.	
CREEP	±0.1%F.S. 5min	
TEMP. EFFECT ON ZERO	±0.3 %F.S./10°C	
TEMP. EFFECT ON OUTPUT	≤ +0.3 %F.S./10°C	
ZERO OUTPUT	±1.0 mV/V	
INPUT RESISTANCE	350 ± 50 Ω	1000 ± 100 Ω
OUTPUT RESISTANCE	350 ± 50 Ω	1000 ± 100 Ω
INSULATION RESISTANCE	≥ 2000 MΩ (50V)	
EXCITATION VOLTAGE	≤ 6 V	
OPERATION TEMP. RANGE	-10 ~ +40°C	
OVERLOAD CAPACITY	150 %F.S.	
RECOMMENDED USE	FISHING SCALES	

Dimensions mm (inch)

