


2F

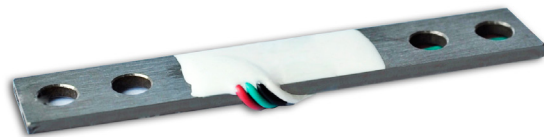

Specifications

CAPACITY	20kg
COMPREHENSIVE ERROR	0.1
OUTPUT SENSITIVITY	2.5 ± 0.4 mV/V
NONLINEARITY	$\pm 0.05\%$ F.S.
REPEATABILITY	$\pm 0.05\%$ F.S.
HYSTERESIS	$\pm 0.05\%$ F.S.
CREEP	$\pm 0.1\%$ F.S.3min
TEMP. EFFECT ON ZERO	$\pm 0.3\%$ F.S./10°C
TEMP. EFFECT ON OUTPUT	$\leq +0.3\%$ F.S./10°C
ZERO OUTPUT	± 1.0 mV/V
INPUT RESISTANCE	$350 \pm 50 \Omega$
OUTPUT RESISTANCE	$350 \pm 50 \Omega$
INSULATION RESISTANCE	≥ 2000 M Ω (50V)
EXCITATION VOLTAGE	≤ 10 V
OPERATION TEMP. RANGE	-10~+40°C
OVERLOAD CAPACITY	150% F.S.
RECOMMENDED USE	PERSONAL SCALES

Dimensions mm (inch)

