


Q45X6X6-7.5G



RoHS

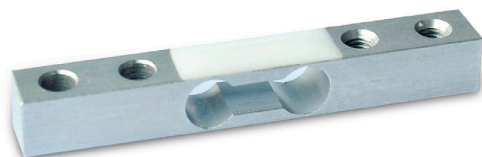

Specifications

CAPACITY	150g
COMPREHENSIVE ERROR	0.05
OUTPUT SENSITIVITY	$0.7 \pm 20\%$ mV/V
NONLINEARITY	$\pm 0.05\%$ F.S.
REPEATABILITY	$\pm 0.05\%$ F.S.
HYSTERESIS	$\pm 0.05\%$ F.S.
CREEP	$\pm 0.05\%$ F.S. 3min
TEMP. EFFECT ON ZERO	$\pm 2.0\%$ F.S./10°C
TEMP. EFFECT ON OUTPUT	$\pm 0.05\%$ F.S./10°C
ZERO OUTPUT	± 0.1 mV/V
INPUT RESISTANCE	$1055 \pm 10 \Omega$
OUTPUT RESISTANCE	$1000 \pm 10 \Omega$
INSULATION RESISTANCE	$\geq 2000 \text{ M}\Omega$ (50V)
EXCITATION VOLTAGE	$\leq 6 \text{ V}$
OPERATION TEMP. RANGE	-10 ~ +40°C
OVERLOAD CAPACITY	150% F.S.
RECOMMENDED USE	HANDABLE SCALES

Dimensions mm(inch)

