


Q70X5X9-H



RoHS

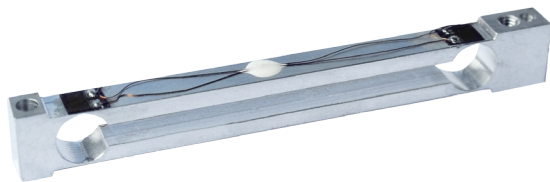

Specifications

CAPACITY	20g/30g/50g/100g/200g
COMPREHENSIVE ERROR	0.05
OUTPUT SENSITIVITY	0.5 ± 0.15 mV/V
NONLINEARITY	± 0.05 % F.S.
REPEATABILITY	± 0.05 % F.S.
HYSTERESIS	± 0.05 % F.S.
CREEP	± 0.05 % F.S. 3min
TEMP. EFFECT ON ZERO	± 2.0 % F.S./10°C
TEMP. EFFECT ON OUTPUT	± 0.05 % F.S./10°C
ZERO OUTPUT	± 0.5 mV/V
INPUT RESISTANCE	1055 ± 10 Ω
OUTPUT RESISTANCE	1000 ± 10 Ω
INSULATION RESISTANCE	≥ 2000 MΩ (50V)
EXCITATION VOLTAGE	≤ 6 V
OPERATION TEMP. RANGE	-10 ~ +40 °C
OVERLOAD CAPACITY	150 % F.S.
RECOMMENDED USE	HANDABLE SCALES

Dimensions mm(inch)

